

ORTEC[®]

AMETEK[®]

trans-SPEC-X-N

N-type Portable Spectrometer




The Premium N-type High Resolution Gamma Spectrometer
for In-Situ, Waste, D&D, or any Portable Measurements.

trans-SPEC-X-N

The trans-SPEC-X-N is a portable, all-inclusive, high resolution gamma spectrometer. It can be used as a stand-alone instrument to collect spectra in the field or controlled by a computer connected via USB, Ethernet, or Wi-Fi using applications such as MAESTRO-Pro (included), GammaVision, Isotopic, and others.

The Trans-SPEC-X-N is physically identical to the popular DETECTIVE-X Radioisotope Identifier which is considered the “Gold Standard” for Mission Critical Detection and Identification. Similar to ORTEC’s legacy TRANS-SPEC-100T and MICRO-TRANS-SPEC instruments, the trans-SPEC-X-N is specifically intended for use as a more economical portable high resolution gamma spectrometer for field measurements rather than an automatic isotopic identifier. The trans-SPEC-X-N model includes warranted resolution performance and MCA Emulation software.

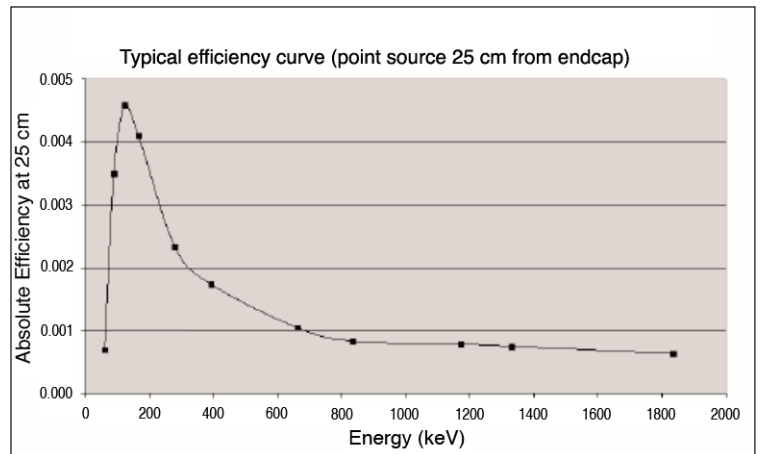

Why trans-SPEC-X-N?

- Large N-Type High Purity Germanium Detector >50% Relative Efficiency
- High Reliability Stirling-Cycle Cooler with Hardened Cryostat
- Digital Signal Processing and active low frequency noise reduction (LFR)
- Rugged design for harsh environments (IP65 compliant)
- Compact and Light-Weight (16.5 lbs / 7.5 kg)
- Long Battery Life (6 hours) with two hot swappable batteries
- Large (4.3 inch) High Resolution touch screen easily readable in sunlight
- Internal and Removable File Storage (>100,000 spectra)
- Computer Control via USB, Ethernet, and Wi-Fi compatible with ORTEC Applications
- Mobile Phone, Tablet, and Computer application mirroring on iOS, Android, and Windows platforms

trans-SPEC-X-N

Application Features

Main Spectrum Display: Log/Lin, Zoom, Region of Interest, Start, Stop, Clear Acquisition, and Save Spectrum.

Peak/ROI Data: Centroid, FWHM, Start/End Channel, Gross and Net Area and Count Rate.

Configurable Spectrum Marker Data: Energy, Channel, Counts.

Configurable Status Lines: Two of any of the following: Live Time, Real Time, Live Time Remaining, Real Time Remaining, Battery Time Remaining, Count Rate, Count Rate in ROI.


MCA Controls: ADC Conversion Gain with Upper and Lower Level Discriminators, Coarse and Fine Amplifier Gain, Base Line Restore (Auto, Fast, Slow), Gain and Zero Stabilizers, High Voltage On/Off.

Acquisition Presets: Live Time, Real Time, ROI Peak, and ROI Integral.

State of Health Status: ± 12 V, +3.3 V, Detector Temperature, Cooler Body Temperature, Cold Tip Temperature, High Voltage.

Security: Password protected User/Admin modes, Lock /Hide Spectrum Display during acquisition.

Energy Calibration: Quadratic fit of energy versus channel.

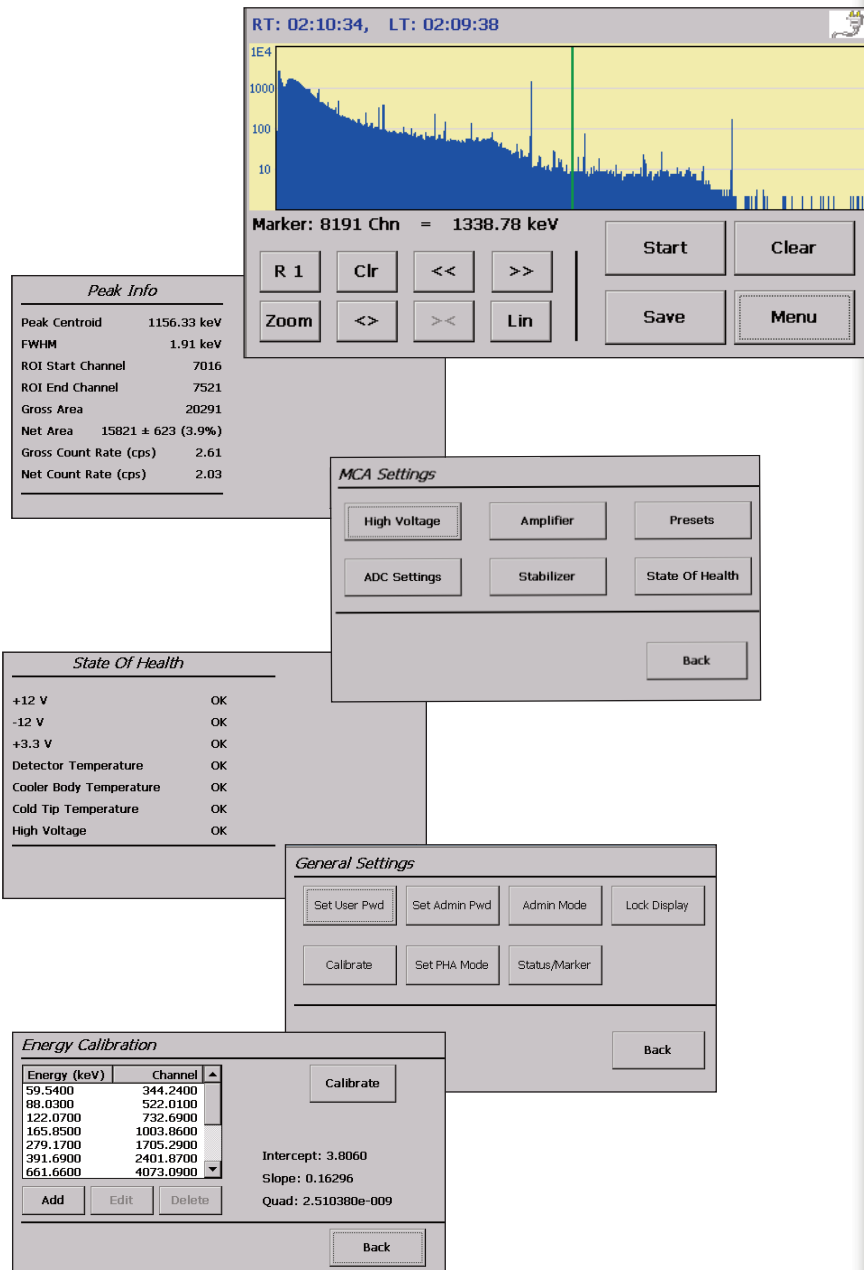

trans-SPEC-X-N

External Application Compatibility

The trans-SPEC-X-N is compatible with all ORTEC CONNECTIONS-based applications such as MAESTRO, MAESTRO-Pro, GammaVision, Isotopic, Renaissance, and the A11 Programmer's Toolkit for a broad range of application uses.

The image illustrates the trans-SPEC-X-N detector's compatibility with ORTEC CONNECTIONS-based applications. It features a laptop displaying the MAESTRO-Pro software interface, which is connected to the trans-SPEC-X-N detector via a wireless connection. The software interface shows a spectrum plot with a peak at 3089.24 keV, identified as Iodine-132. The peak analysis results are as follows:

- Peak: 3089.24 = 772.67 keV
- FWHM: 1.52 FW(1/5)M: 2.30
- Library: I-132 [Iodine] at 772.61 : 0.1082 μ Ci
- Gross Area: 27422
- Net Area: 24348 \pm 190
- Gross/Net Count Rate: 10.16 / 9.02 cps

The software interface also displays a full spectrum plot with peaks for K-40, I-132, and Cs-137. The detector configuration settings for a cylindrical container are shown in the bottom right screenshot:

- Detector 1 of 1
- Name: No detector
- Type: P Type
- Crystal Dimension (in mm): Length: 30, Diameter: 85
- Detector Configuration: Orientation: Front, Weighting: 1.0
- Detector Height: 60.9600 cm
- Offset from Edge: 11.9000 cm
- Detector Standoff (Distance from Collimator Front to Inner Container): Standoff: 88.9000 cm
- Detector Collimator: No Collimator, Depth (Recess): cm, Thickness: cm, Inner Diameter: cm
- Collimator Material: Pb

trans-SPEC-X-N

TECHNICAL SPECIFICATIONS

DETECTOR / COOLER

Crystal: N-type high-purity germanium (HPGe). Coaxial construction.

Relative Efficiency: $\geq 50\%$ typical (ANSI/IEEE 325-1996).

Resolution: ≤ 1600 eV @ 122 keV and ≤ 2.5 keV @ 1332 keV (FWHM Warranted at optimum settings).

Peak Shape: 1.9 typical (FWTM/FWHM).

Cryostat and Cooler: "Hardened" cryostat, with high-reliability, low-power Stirling cooler. The cryostat design is such that the unit may be switched off at any time and power subsequently re-applied without having to wait for a full thermal cycle (full warm up before cool down). This feature greatly increases system availability during measurement campaigns.

Cool Down Time: The high-reliability cooler is designed for continuous operation. Between making measurements the unit is powered from a DC supply, car battery or other device. Initial cool down time depends on ambient temperature, but is typically 7 hours at 25°C.

DIGITAL MCA AND DATA PROCESSOR

Digital Low Frequency Noise Suppression: "LFR Filter".

Conversion Gain: Up to 16k channels.

Display: 4.3" WQVGA (480 x 272 pixels) sunlight readable, touch sensitive, operate with finger or stylus.

Data Processor: FREESCALE I.MX535 operating at 1 GHz.

Data Storage Media: Internal RAM and removable low profile USB Flash drive. The unit is shipped with a USB Flash drive which can store over 100,000 spectra.

File Format: ORTEC CHN and SPC spectrum formats.

Computer and Device Interfacing: USB, Ethernet TCP/IP v4 connections via standard RJ45 Ethernet connection (10/100 Mbps, auto-sensing), Wi-Fi (IEEE 802.11a/b/g/e/i/h/j standards and IEEE 802.11n with protected access protocols including WPA and WPA2). Mobile MCB Server enables remote control through ORTEC CONNECTIONS-based applications, such as MAESTRO, GammaVision, etc.. Wisemo is used for device application mirroring and control.

PHYSICAL

Maximum Overall Dimensions: (including handle and Ge detector endcap) 16.7 in L x 5.6 in W x 8.3 in H (42.4 cm L x 14.1 cm W x 21 cm H).

Weight: 16.5 lbs (7.5 kg).

Internal Battery: 2 Rechargeable Lithium Ion. 98 Wh each, nominal. Approximately 6 hours of battery life at 25°C when HPGe detector is cold. <4 hour time to charge. Internal battery is easily swapped.

External Battery: Battery lifetime may be extended indefinitely by the use of optional external battery packs. An external military battery (Model 2590) weighs less than 3.25 lbs and extends lifetime to >14 hrs.

Input Power: 12 to 17 V DC from battery or DC power supply (universal mains supply included).

Power Usage: Highest during cool down and charging battery: <100 Watt. Cold with fully charged battery <35 W.

Operation Range: Temperature: -20°C to 50°C. Relative Humidity: 95% non-condensing.

Instrument Enclosure: IP65 Sealed against ingress of dust and water. All perforations are sealed by rubber plugs (connectors, memory cards, etc.).

trans-SPEC-X-N

Ordering Information

Model	Description
TRANS-SPEC-X-N	Ultra-Light-Weight, Portable, High Efficiency, Standard HPGe Spectrometer with 11 MeV Energy Range. Includes mains adapter, and MAESTRO-PRO software. Does not include Radioisotopic Identification applications (Detective X, Sleuth, and RAPiD).

Accessories

Model	Description
DETECTIVE-X-ACC-BAT	Lithium-Ion Battery.
DETECTIVE-X-ACC-DUAL-CHGR	Standalone dual battery charger and calibrator.
DETECTIVE-X-ACC-VEHCHGR	Vehicle powered adapter cable.
DETECTIVE-X-ACC-PS	Universal AC mains power supply.
DETECTIVE-X-ACC-2590-CABLE	Battery Cable for connection to Military 2590 battery.
DETECTIVE-X-ACC-TRANSPORTCASE	Wheeled Transport Case.
DETECTIVE-X-ACC-USBFLASH	USB Mini Flash Drive.
DETECTIVE-X-ACC-WIFI-ADAPTER	WiFi 802.11 B/G/N USB Adapter.
DETECTIVE-X-ACC-SHOULDER-STRAP	Shoulder Strap.
DETECTIVE-X-ACC-MANUAL	Manual.
DETECTIVE-X-ACC-STYLUS	Stylus.
DETECTIVE-X-ACC-RETRACTABLE-CORD	Retractable Cord for Stylus.
DETECTIVE-X-OPT-RFSECURE	Removal of WiFi, Bluetooth, and GPS signal capability from Detective-X-TS.
EXT-BAT-X	Ultra Battery Extender. Includes battery, charger and cable for Detective-X-TS.
M-1-T2-X-VERT	Variable length tripod and mounting hardware for Detective-X-TS
M-1-T2	Variable length tripod for Detective-X-TS
M-1-T2-BRKT-X-VERT	Vertical mounting bracket for Detective-X-TS on M-1-T2 tripod

trans-SPEC-X-N

trans-SPEC-X-N

Specifications subject to change
072723

ORTEC[®]

www.ortec-online.com

Tel. (865) 482-4411 • Fax (865) 483-0396 • ortec.info@ametek.com
801 South Illinois Ave., Oak Ridge, TN 37830 U.S.A.
For International Office Locations, Visit Our Website

AMETEK[®]
ADVANCED MEASUREMENT
TECHNOLOGY